




**NORTECH**  
IDENTIPARK

**NMS**

**NUMERICAL MESSAGE SIGN**

The NMS is used to indicate the number of available parking spaces in any given direction and is designed for indoor and outdoor applications. The NMS consists of four (4) characters and should either be used in conjunction with an Intersection Guidance Display or as a 3-digit display with the first/last character used to display an arrow/cross.

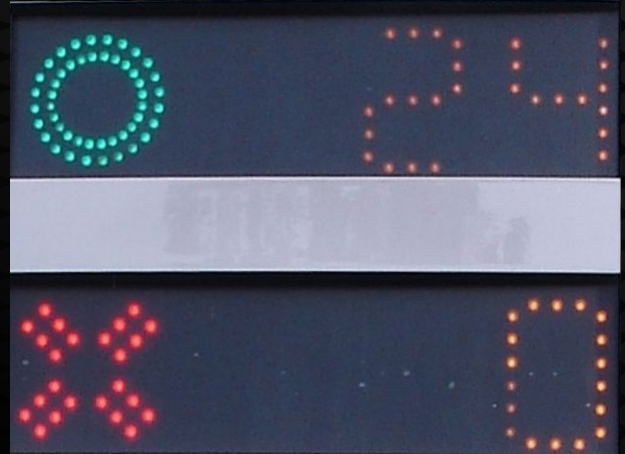

### PRODUCT VARIATIONS

- 3 to 4 characters (one can be an arrow symbol)
- 2", 4" or 6" character height
- Red, green or orange

### TECHNICAL DATA

<b>Input Bus</b>	IdentiPark Sensor Bus, from the IntelliBooster DC Power and Multi-drop RS485 Communications
<b>LED Indications</b>	7-Segment display, optional 1 × "arrow/cross" character (Up, Down, Left & Right)
<b>Power Supply</b>	13.8 to 56 VDC (Sensor Bus supplied)
<b>Dimensions</b>	199mm × 8502mm × 208mm (4", 2 characters) 199mm × 85.2mm × 315mm (4", 3 characters) Each additional character, add 107mm
<b>Mounting</b>	Ceiling or wall mount
<b>Material</b>	Aluminum, mild steel and Perspex
<b>Operating temperature</b>	-30°C to +60°C
<b>Storage Temperature</b>	-40°C to +85°C
<b>Humidity</b>	Up to 98% non-condensing
<b>EMC</b>	As per CISPR 22 and CISPR 24 IEC6100-4-2, IEC6100-4-3, IEC6100-4-4, IEC6100-4-6
<b>Safety</b>	As per UL/CSA-60950, EN60950 and IEC60950
<b>Housing</b>	IP54

### ORDERING INFORMATION

<b>Contact</b>	info@identipark.com for the correct solution for your specific application
----------------	--

**NORTECH**  
INTERNATIONAL

design . detect . deliver